

alkè
ELECTRIC VEHICLES



ATX
R A N G E

1L
CLOUD
CONNECTED
■■■■■

Li
LITHIUM
POWERED
■■■■■



ATX
R A N G E

• ELECTRIC VEHICLES



ECOLOGICAL

Zero CO2 emissions and no noise pollution.



The Alke' electric vehicles work in closed environments, in restricted traffic areas and where there are strict environmental limits. Mobility is no longer a problem within hospitals, recovery centres, university campuses, sporting arenas, natural protected areas and cultural sites.



ROAD DRIVING

N1 type-approved for road circulation in Europe.

Alke' electric vehicle are always at the centre of city life and are ideal for use by municipalities, logistical operators in historic city centres, environmental and waste collection services, postal services, catering services, street food, etc.



ALWAYS READY

High autonomy and non-stop operation for shift work.

Alke' electric vehicles are always by your side. Choose a high capacity battery, a quick charge system for Lithium batteries or the battery swap system and you will never be left standing.

HIGH-PERFORMANCE

High performance Motors and Controllers.

The Alke' electric vehicles are fitted with motors providing high torque and gradual power distribution, ideal for intensive industrial use and at the same time, for handling demanding off-road terrain, such as sand, snow or ice.



ROBUST

Designed to last.




Alke' electric vehicles are fitted with technical solutions and components originating from the off-road and industrial sectors which, together with high level construction standards, make them unique in terms of robustness and reliability.



COMPACT BUT TENACIOUS

Versatility in a concentrated form.

Alke' electric vehicles are compact, ideal for working in restricted areas (also indoors), but at the same time offer service levels which are second to none when compared to similar vehicles; it is no coincidence that they are the preferred choice for the most important European industrial players, and not only.





HUNDREDS
OF AVAILABLE
SOLUTIONS

**Find out among
our configurations
the best solution
for your needs!**

Alke' can
develop special
configurations
upon request.

All the
configurations
presented are
available for the
vehicles with:

2-seat
cab

4-seat
cab

left-hand
drive


right-hand
drive

DR1




Dropside
body

TP1



Dropside
tipper body

TP3




3-side
tipper body

ME1



Dropside body with
mesh sides extension

DR2



Dropside body with
front storage box

ME2




Dropside body with
front storage box
+ mesh sides extension

BV2




Box van body with
roller shutter doors

TA1




Tarpaulin body
openable on three sides

IS1



Isothermal
body

RE1




Refrigerated body
0 +4 °C

TL1



Tail lift and dropside body
+ mesh sides extension

TL2



Tail lift and
box van body

RS1




Rear
seats kit

RS2




Rear seats kit
with roof

RS3




Box van body with
double bench seats

LH1



Roof ladder
holder

AM1



Ambulance
body

AM2



Ambulance body
with roof

Off-road Vehicles


Vehicle with set-up and
tyres for off-road use,
also compatible with
alternative cargo area
configurations.

OR1




Off-road
version

WA1




Waste collection
body

WA2




Waste collection body
with rear bin lift system

WA3



Waste collection body
with tarp system

WA4



Waste collection body
with front storage box

WA5




Waste collection body
with power washer

FF1



Water-based
firefighting unit

WP1



Watering unit

CL1



Cleaning unit
with high pressure
washer 210 L

CL2




Cleaning unit
with high pressure
washer 600 L

TW1




Hitch for airport
operations with
rear control panel

CR1


Dropside body
with crane

HO1




Hooklift


ST1

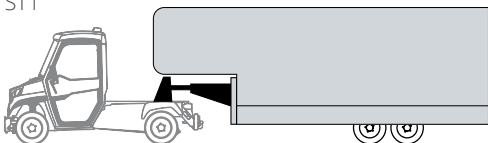Semi-trailer coupling system
fitting DIN Ø40 drawbar eyes


ST2

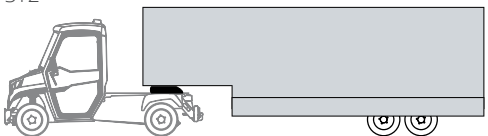Semi-trailer coupling system
with fifth wheel fitting 2" kingpins


SN1

Front snow
plough

SN2

Rear salt
spreader

RL1

Rail-System for
Rail truck conversionCostumised
configurationsautonomy
[km*]load
capacity
[kg*]cargo
area
[mm]towing capacity
on road
[kg*]towing capacity
not on road
[kg*]cab
seats
[persons]
ATX
R A N G E
ATX 340E

200

1.275

2.000 X 1.400
1.800 x 1.230

2.000

3.000

**ATX 340EH**

190

1.630

2.500 X 1.400
2.000 X 1.400
1.800 x 1.230

2.000

4.500

**ATX 340ED**

190

1.155

2.000 X 1.400
1.800 x 1.230

2.000

3.000

**ATX 330E**

64

1.220

2.000 X 1.400
1.800 x 1.230

2.000

3.000

**ATX 320E**

72

610

1.800 x 1.230

1.200

2.000

**ATX 310E**

72

620

1.300 x 1.230

1.200

2.000



* Maximum indicative values under optimum conditions, refer to the data sheet on the following pages for additional or more detailed information.



ATX 
R A N G E



DO YOU WANT THE BEST ON AND OFF-ROAD?

Choose the top of the range ATX 340E model with 20kWh lithium battery for on-road use with high autonomy or opt for its heavy-duty ATX 340EH version if you need maximum torque for off-road use or for intensive workloads in industrial environments.

Choose the load area configuration that best suits your needs with 3 different platform lengths available and dozens of open or closed layouts, including a combination version.



CO₂

Increase driving comfort by adding EPS and cab air conditioning to your vehicle configuration.

Allow your operations centre to follow the activities of your electric vehicle fleet with the ALKE VBC package that connects you to the ALKE cloud for real-time remote monitoring and diagnostics of each vehicle on site.

Extend your operations with the optional fast charger for 24-hour operation.

Enable the movement of teams of up to 4 people with the dual cab design of the ATX 340ED and 340EDH.



PUBLIC SECTOR

municipal services, hospitals, school and university campuses, community services, cemeteries, park and green area maintenance, waste collection services, ecological and environmental services, civil protection, fire-prevention services, maintenance services in historical centres



ATX
R A N G E



INDUSTRY AND COMMERCE

industrial plants, shipyards, logistical centres, ports and airports, inter-ports, railway stations, exhibition structures, postal and courier services, catering services, home delivery services, conference centres, shopping centres



TOURISM SECTOR

holiday parks, resorts, residences and hotels, golf clubs, parks, camp sites, beaches, seaside resorts, tourist-cultural sites, cultural sites, zoos and amusement parks, sport centres, ski centres, first aid services



READY
FOR ANY
SECTOR



AGRICULTURE SECTOR

farms, farmhouses, riding schools, organic farming centres, fish farms, vineyards, wooded areas, garden centres, nurseries, floriculture, greenhouses, estates on flat or hilly terrain, maintenance of parks of villas and castles




ATX

R A N G E



TECHNICAL DATA

The ATX electric vehicles are available with 5 different wheelbases, left-hand drive and right-hand drive, cab with 2 or 4 seats, 3 different sized cargo beds with the possibility of customised variants upon request.

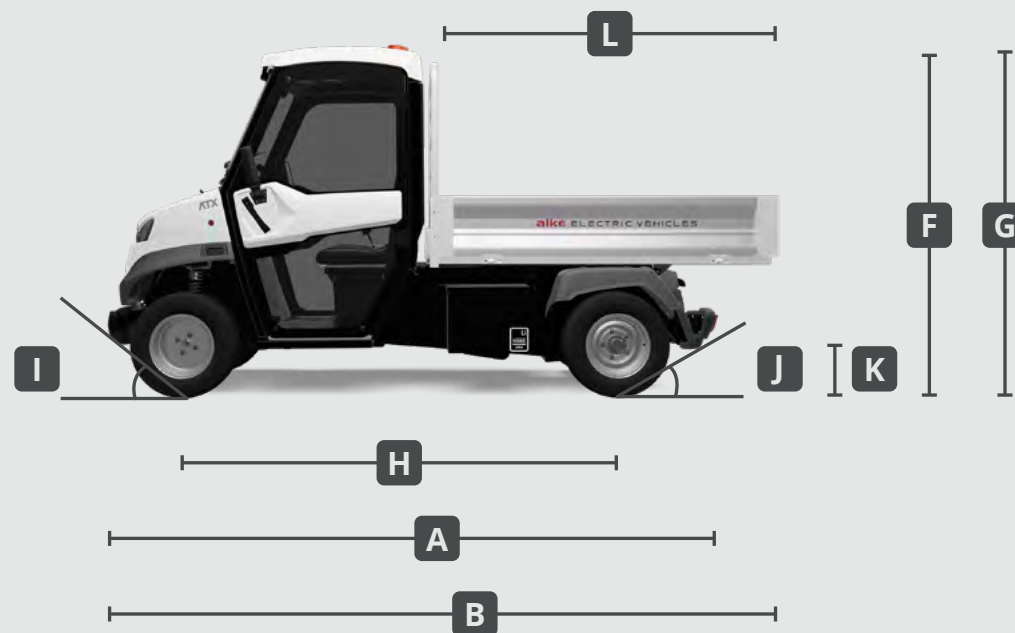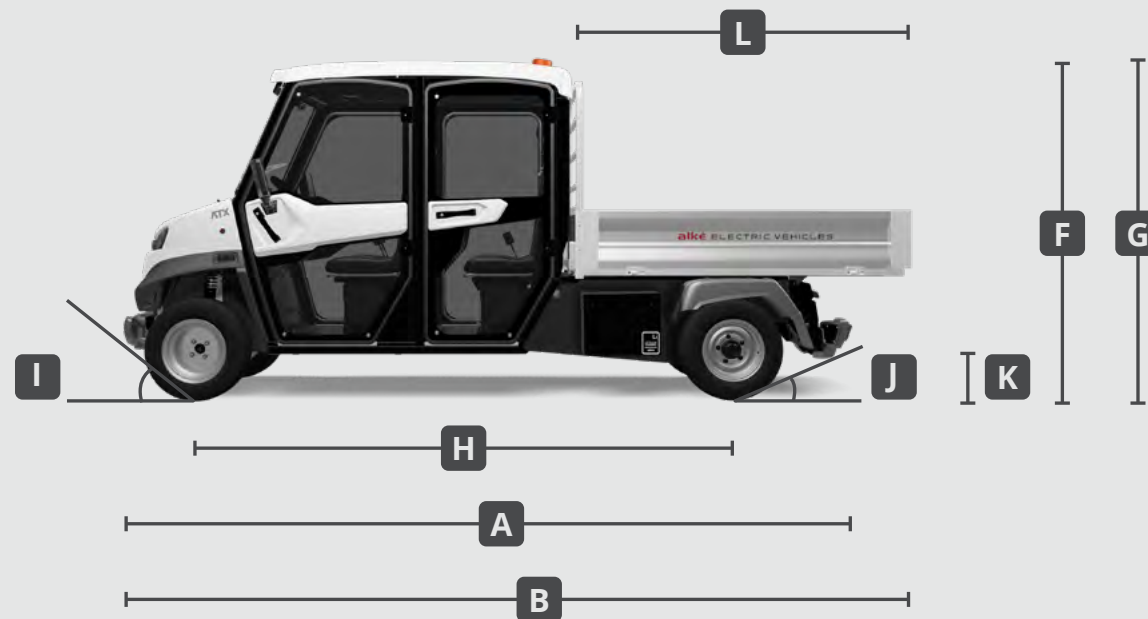

		310	320	330				340				weight [kg]
		E	E	E	ED	EH	EDH	E	ED	EH	EDH	
TYPE-APPROVAL CAB SEATS												
EU on-road type-approval		N1	N1	N1	N1	N1	N1	N1	N1	N1	N1	
seats inside the cab		2	2	2	4	2	4	2	4	2	4	
right-hand drive		Δ	Δ	Δ	Δ	Δ	Δ	Δ	Δ	Δ	Δ	+ 0.0
PERFORMANCE												
top speed	[km/h]	44	44	44	44	35	35	44	44	35	35	
maximum negotiable slope (with high-performance batteries)	[%]	30	30	32	27	35	30	30	25	35	30	
maximum autonomy	Lead-Acid 10 kWh [km]	72	72	64	64	64	64					
	Lead-Acid 14.4 kWh [km]							119	111	111	101	
	Gel 8.7 kWh [km]	61	61	54	54	54	54					
	Gel 13.2 kWh [km]							101	94	94	86	
	Lithium (LiFePO4) 10 kWh [km]							86	85	85	85	
	Lithium (LiFePO4) 20 kWh [km]							200	190	190	181	
DIMENSIONS												
A length (chassis version)	[mm]	2.860	3.220	3.220	3.980	3.220	3.980	3.220	3.980	3.220 ⁽¹⁾⁽²⁾ 3.720 ⁽³⁾	3.980	
B length (version with cargo bed)	[mm]	3.030	3.530	3.530 ⁽¹⁾ 3.730 ⁽²⁾	4.290 ⁽¹⁾ 4.490 ⁽²⁾	3.530 ⁽¹⁾ 3.730 ⁽²⁾	4.290 ⁽¹⁾ 4.490 ⁽²⁾	3.530 ⁽¹⁾ 3.730 ⁽²⁾	4.290 ⁽¹⁾ 4.490 ⁽²⁾	3.530 ⁽¹⁾ 3.730 ⁽²⁾ 4.230 ⁽³⁾	4.290 ⁽¹⁾ 4.490 ⁽²⁾	
C vehicle cab width (without rear-view mirrors)	[mm]	1.215	1.215	1.215	1.215	1.215	1.215	1.215	1.215	1.215	1.215	
D vehicle cab width (with wing mirrors closed)	[mm]	1.380	1.380	1.380	1.380	1.380	1.380	1.380	1.380	1.380	1.380	
E vehicle cab width (with wing mirrors open)	[mm]	1.650	1.650	1.650	1.650	1.650	1.650	1.650	1.650	1.650	1.650	
F cab height (with standard tyres)	[mm]	1.890	1.890	1.890	1.890	1.890	1.890	1.890	1.890	1.890	1.890	
G vehicle height with beacon light (with standard tyres)	[mm]	1.980	1.980	1.980	1.980	1.980	1.980	1.980	1.980	1.980	1.980	
H wheelbase	[mm]	1.850	2.130	2.130 ⁽¹⁾ 2.230 ⁽²⁾	2.890 ⁽¹⁾ 2.990 ⁽²⁾	2.130 ⁽¹⁾ 2.230 ⁽²⁾	2.890 ⁽¹⁾ 2.990 ⁽²⁾	2.130 ⁽¹⁾ 2.230 ⁽²⁾	2.890 ⁽¹⁾ 2.990 ⁽²⁾	2.130 ⁽¹⁾ 2.230 ⁽²⁾ 2.630 ⁽³⁾	2.890 ⁽¹⁾ 2.990 ⁽²⁾	
I approach angle	[°]	40	40	40	40	40	40	40	40	40	40	
J departure angle	[°]	16	13	13 ⁽¹⁾ 11 ⁽²⁾	10 ⁽¹⁾ 9 ⁽²⁾	13 ⁽¹⁾ 11 ⁽²⁾	10 ⁽¹⁾ 9 ⁽²⁾	12 ⁽¹⁾ 10 ⁽²⁾	9 ⁽¹⁾ 8 ⁽²⁾	12 ⁽¹⁾ 10 ⁽²⁾⁽³⁾	9 ⁽¹⁾ 8 ⁽²⁾	
K rear axle distance from ground	[mm]	130	130	130	130	130	130	130	130	130	130	
L maximum loading bed length	[mm]	1.400	1.800	1.800 ⁽¹⁾ 2.000 ⁽²⁾	1.800 ⁽¹⁾ 2.000 ⁽²⁾	1.800 ⁽¹⁾ 2.000 ⁽²⁾	1.800 ⁽¹⁾ 2.000 ⁽²⁾	1.800 ⁽¹⁾ 2.000 ⁽²⁾	1.800 ⁽¹⁾ 2.000 ⁽²⁾	1.800 ⁽¹⁾ 2.000 ⁽²⁾ 2.500 ⁽³⁾	1.800 ⁽¹⁾ 2.000 ⁽²⁾	
M maximum loading bed width	[mm]	1.400	1.500	1.500	1.500	1.500	1.500	1.500	1.500	1.500	1.500	
WEIGHTS CAPACITY AND TOWING												
UVW unloaded vehicle weight (chassis version with battery)	Lead-Acid 10 kWh [kg]	890	900	930	1.050	935	1.055					
	Lead-Acid 14.4 kWh [kg]							1.170	1.290	1.175 ⁽¹⁾⁽²⁾ 1.370 ⁽³⁾	1.295	
	Gel 8.7 kWh [kg]	890	900	930	1.050	935	1.055					
	Gel 13.2 kWh [kg]							1.170	1.290	1.175	1.295	
	Lithium (LiFePO4) 10 kWh [kg]							875	995	880 ⁽¹⁾⁽²⁾ 1.030 ⁽³⁾	1000	
	Lithium (LiFePO4) 20 kWh [kg]							965	1085	970 ⁽¹⁾⁽²⁾ 1.120 ⁽³⁾	1.090	
GVW gross vehicle weight (max weight for fully-loaded vehicle)	[kg]	1.510	1.510	2.150	2.150	2.510	2.510	2.150	2.150	2.510	2.510	
GCW gross combined weight (max weight for fully-loaded vehicle + trailer)	[kg]	2.500	2.500	4.100	4.100	4.100	4.100	4.100	4.100	4.100	4.100	
maximum towing capacity (on road braked trailer)	[kg]	1.200	1.200	2.000	2.000	2.000	2.000	2.000	2.000	2.000	2.000	
maximum traction power	[N]	2.800	2.800	5.230	5.230	6.500	6.500	5.230	5.230	6.500	6.500	
maximum towing capacity (not on road braked trailer)	[kg]	2.000	2.000	3.000	3.000	4.500	4.000	3.000	3.000	4.500	4.000	
maximum chassis load capacity (= GVW - UVW)	Lead-Acid 10 kWh [kg]	620	610	1.220	1100	1.575	1.455					
	Lead-Acid 14.4 kWh [kg]							980	860	1.335 ⁽¹⁾⁽²⁾ 1.140 ⁽³⁾	1.215	
	Gel 8.7 kWh [kg]	620	610	1.220	1100	1.575	1.455					
	Gel 13.2 kWh [kg]							980	860	1.335 ⁽¹⁾⁽²⁾ 1.480 ⁽³⁾	1.215	
	Lithium (LiFePO4) 10 kWh [kg]							1.275	1.155	1.630 ⁽¹⁾⁽²⁾ 1.480 ⁽³⁾	1.510	
	Lithium (LiFePO4) 20 kWh [kg]							1.185	1.065	1.540 ⁽¹⁾⁽²⁾ 1.390 ⁽³⁾	1.420	

• as standard

Δ optional

! compatible but not type-approved for road circulation

⁽¹⁾ vehicle with standard wheelbase⁽²⁾ long wheelbase for 200 cm or 50+150 cm COMBI.⁽³⁾ long wheelbase for 250 cm or 50+150 cm COMBI.

	310	320	330				340				weight [kg]
	E	E	E	ED	EH	EDH	E	ED	EH	EDH	
MOTOR CONTROLLER											
48V AC asynchronous induction electric motor	•	•	•	•	•	•	•	•	•	•	
maximum motor power	[kW] 14	14	14	14	14	14	14	14	14	14	
maximum motor torque	[Nm] 113	113	113	113	113	113	113	113	113	113	
CURTIS 48V control electronics	•	•	•	•	•	•	•	•	•	•	
vehicle performance settings (ECO and SPORT)	•	•	•	•	•	•	•	•	•	•	
auxiliary cooling system for motor / controller	Δ	Δ	Δ	Δ	Δ	Δ	Δ	Δ	Δ	Δ	+ 2.0
Vehicle Body Computer (VBC)	Δ	Δ	Δ	Δ	Δ	Δ	Δ	Δ	Δ	Δ	
12M STD Cloud Service license	Δ	Δ	Δ	Δ	Δ	Δ	Δ	Δ	Δ	Δ	
12M PRO Cloud Service license	Δ	Δ	Δ	Δ	Δ	Δ	Δ	Δ	Δ	Δ	
TRANSMISSION											
transmission with electronic speed variation	•	•	•	•	•	•	•	•	•	•	
rear wheel drive	•	•	•	•	•	•	•	•	•	•	
heavy duty differential unit			•	•	•	•	•	•	•	•	
SUSPENSIONS											
front suspension with MacPherson type independent wheels	•	•	•	•	•	•	•	•	•	•	
rear suspension with De-Dion bridge and stabiliser bar	•	•	•	•	•	•	•	•	•	•	
BRAKES											
front hydraulic discs brakes and rear hydraulic drum brakes	•	•	•	•	•	•	•	•	•	•	
rear hydraulic drum brakes with mechanical servobrake			•	•	•	•	•	•	•	•	
parking brake	•	•	•	•	•	•	•	•	•	•	
regenerative brake	•	•	•	•	•	•	•	•	•	•	
STEERING											
rack and pinion steering	•	•	•	•	•	•	•	•	•	•	
electric power steering (EPS)	Δ	Δ	Δ	Δ	Δ	Δ	Δ	Δ	Δ	Δ	+ 7.0
minimum turning radius internal	[mm] 2.300	2.600	2.600 ⁽¹⁾ 2.620 ⁽²⁾	4.110 ⁽¹⁾ 4.130 ⁽²⁾	2.600 ⁽¹⁾ 2.620 ⁽²⁾	4.110 ⁽¹⁾ 4.130 ⁽²⁾	2.600 ⁽¹⁾ 2.620 ⁽²⁾	4.110 ⁽¹⁾ 4.130 ⁽²⁾	2.600 ⁽¹⁾ 2.620 ⁽²⁾ 4.100 ⁽³⁾	4.110 ⁽¹⁾ 4.130 ⁽²⁾	
BODY CHASSIS											
white body	•	•	•	•	•	•	•	•	•	•	
customised body colour	Δ	Δ	Δ	Δ	Δ	Δ	Δ	Δ	Δ	Δ	+ 0.0
steel chassis with anti-corrosion treatment and powder coating finish	•	•	•	•	•	•	•	•	•	•	
impact-resistant polyethylene front and rear bumpers	•	•	•	•	•	•	•	•	•	•	
SAFETY											
3-point seat belt for driver and passenger(s)	•	•	•	•	•	•	•	•	•	•	
immobilizer and presence sensor on driver's seat	•	•	•	•	•	•	•	•	•	•	
steering lock with key	•	•	•	•	•	•	•	•	•	•	
horn / reverse buzzer	•	•	•	•	•	•	•	•	•	•	
rear view camera with LCD rear view monitor	Δ	Δ	Δ	Δ	Δ	Δ	Δ	Δ	Δ	Δ	
forward gear buzzer activable from dashboard	Δ	Δ	Δ	Δ	Δ	Δ	Δ	Δ	Δ	Δ	
safety switch inside the cab for 48 V drive battery	•	•	•	•	•	•	•	•	•	•	
safety switch inside the cab for 12 V service battery	•	•	•	•	•	•	•	•	•	•	
tyre repair kit	•	•	•	•	•	•	•	•	•	•	
LIGHTS											
front and rear lights in road style	•	•	•	•	•	•	•	•	•	•	
full LED rear lights	•	•	•	•	•	•	•	•	•	•	
rear fog light and LED reversing light	•	•	•	•	•	•	•	•	•	•	
LED DRL lights	•	•	•	•	•	•	•	•	•	•	
orange flashing LED on cab roof	Δ	Δ	Δ	Δ	Δ	Δ	Δ	Δ	Δ	Δ	+ 2.0
blue flashing LED on cab roof	Δ	Δ	Δ	Δ	Δ	Δ	Δ	Δ	Δ	Δ	+ 2.0
CAB COMFORT											
timed heated windshield	•	•	•	•	•	•	•	•	•	•	
electric demister	Δ	Δ	Δ	Δ	Δ	Δ	Δ	Δ	Δ	Δ	+ 7.0
Webasto heating (as an alternative to electric demister)	Δ	Δ	Δ	Δ	Δ	Δ	Δ	Δ	Δ	Δ	+ 13.0
air-conditioning	Δ	Δ	Δ	Δ	Δ	Δ	Δ	Δ	Δ	Δ	+ 25.0
adjustable seats	•	•	•	•	•	•	•	•	•	•	
front doors	•	•	•	•	•	•	•	•	•	•	

• as standard

Δ optional

! compatible but not type-approved for road circulation

⁽¹⁾ vehicle with standard wheelbase

⁽²⁾ long wheelbase for 200 cm or 50+150 cm COMBI.

⁽³⁾ long wheelbase for 250 cm or 50+150 cm COMBI.

				310	320	330				340				weight [kg]
				E	E	E	ED	EH	EDH	E	ED	EH	EDH	
front doors with sliding windows				Δ	Δ	Δ	Δ	Δ	Δ	Δ	Δ	Δ	Δ	+ 0.0
rear doors							•		•		•		•	
armrests				Δ	Δ	Δ	Δ	Δ	Δ	Δ	Δ	Δ	Δ	+ 3.5
headrests				•	•	•	•	•	•	•	•	•	•	
rear seat bench							!		!		!		!	+ 22.0
cab interior lighting				•	•	•	•	•	•	•	•	•	•	
sun visors				Δ	Δ	Δ	Δ	Δ	Δ	Δ	Δ	Δ	Δ	
rear-view camera with internal LCD color monitor				Δ	Δ	Δ	Δ	Δ	Δ	Δ	Δ	Δ	Δ	
car audio system AM/FM/DAB/DAB+ with USB and Bluetooth				Δ	Δ	Δ	Δ	Δ	Δ	Δ	Δ	Δ	Δ	
rear speakers for 4-seats models							Δ		Δ		Δ		Δ	
openable front windscreen				•	•	•	•	•	•	•	•	•	•	
central door locks with remote control				Δ	Δ	Δ	Δ	Δ	Δ	Δ	Δ	Δ	Δ	
windscreen wiper with windscreen washer				•	•	•	•	•	•	•	•	•	•	
DASHBOARD														
ECO / SPORT selector				•	•	•	•	•	•	•	•	•	•	
12V 10A socket				•	•	•	•	•	•	•	•	•	•	
speedometer (km / mph)				•	•	•	•	•	•	•	•	•	•	
hour meter				•	•	•	•	•	•	•	•	•	•	
indicators				•	•	•	•	•	•	•	•	•	•	
battery state of charge				•	•	•	•	•	•	•	•	•	•	
battery capacity				•	•	•	•	•	•	•	•	•	•	
inverter temperature				•	•	•	•	•	•	•	•	•	•	
inverter errors				•	•	•	•	•	•	•	•	•	•	
motor temperature				•	•	•	•	•	•	•	•	•	•	
current delivered by inverter				•	•	•	•	•	•	•	•	•	•	
dashboard LCD colour display				•	•	•	•	•	•	•	•	•	•	
warning lights				•	•	•	•	•	•	•	•	•	•	
indicators				•	•	•	•	•	•	•	•	•	•	
doors lock				•	•	•	•	•	•	•	•	•	•	
lifted cargo bed				•	•	•	•	•	•	•	•	•	•	
heated windshield				•	•	•	•	•	•	•	•	•	•	
side lights				•	•	•	•	•	•	•	•	•	•	
headlights				•	•	•	•	•	•	•	•	•	•	
rear fog light				•	•	•	•	•	•	•	•	•	•	
Webasto fuel shortage				•	•	•	•	•	•	•	•	•	•	
electric demister				•	•	•	•	•	•	•	•	•	•	
EPS				•	•	•	•	•	•	•	•	•	•	
battery on charge status				•	•	•	•	•	•	•	•	•	•	
electric motor overheating				•	•	•	•	•	•	•	•	•	•	
beacon light				•	•	•	•	•	•	•	•	•	•	
forward gear				•	•	•	•	•	•	•	•	•	•	
backward gear				•	•	•	•	•	•	•	•	•	•	
neutral gear				•	•	•	•	•	•	•	•	•	•	
aux 1				•	•	•	•	•	•	•	•	•	•	
aux 2				•	•	•	•	•	•	•	•	•	•	
BATTERY														
type / capacity														
type				•	•	•	•	•	•	•	•	•	•	
Lead-Acid 10 kWh										•	•	•	•	
Lead-Acid 14.4 kWh														
Gel 8.7 kWh				Δ	Δ	Δ	Δ	Δ	Δ					
Gel 13.2 kWh										Δ	Δ	Δ	Δ	
Lithium (LiFePO4) 10 kWh										Δ	Δ	Δ	Δ	
Lithium (LiFePO4) 20 kWh										Δ	Δ	Δ	Δ	
number of batteries				8x6V	8x6V	8x6V	8x6V	8x6V	8x6V					
Lead-Acid 10 kWh										24x2V	24x2V	24x2V	24x2V	
Lead-Acid 14.4 kWh														
Gel 8.7 kWh				8x6V	8x6V	8x6V	8x6V	8x6V	8x6V					
Gel 13.2 kWh										24x2V	24x2V	24x2V	24x2V	
Lithium (LiFePO4) 10 kWh										1x48V	1x48V	1x48V	1x48V	
Lithium (LiFePO4) 20 kWh										1x48V	1x48V	1x48V	1x48V	
estimated battery life														
Lead-Acid 10 kWh [cycles]				1.200	1.200	1.200	1.200	1.200	1.200					
Lead-Acid 14.4 kWh [cycles]										1.500	1.500	1.500	1.500	
Gel 8.7 kWh [cycles]				700	700	700	700	700	700					
Gel 13.2 kWh [cycles]										1.200	1.200	1.200	1.200	
Lithium (LiFePO4) 10 kWh [cycles]										2.000	2.000	2.000	2.000	
Lithium (LiFePO4) 20 kWh [cycles]										2.000	2.000	2.000	2.000	
estimated battery charge time														
Lead-Acid 10 kWh [hours]				8	8	8	8	8	8					
Lead-Acid 14.4 kWh [hours]										8	8	8	8	
Gel 8.7 kWh [hours]				11	11	11	11	11	11					
Gel 13.2 kWh [hours]										11	11	11	11	
Lithium (LiFePO4) 10 kWh [hours]										3.5	3.5	3.5	3.5	
Lithium (LiFePO4) 20 kWh [hours]										6.5	6.5	6.5	6.5	
Lithium (LiFePO4) 10 kWh [hours]										1.5	1.5	1.5	1.5	
Lithium (LiFePO4) 20 kWh with quick charge [hours]										2.6	2.6	2.6	2.6	

				310	320	330				340				weight [kg]
				E	E	E	ED	EH	EDH	E	ED	EH	EDH	
consumption for complete recharge	Lead-Acid 10 kWh [kWh]			9	9	9	9	9	9					
	Lead-Acid 14.4 kWh [kWh]									13	13	13	13	
	Gel 8.7 kWh [kWh]			7.5	7.5	7.5	7.5	7.5	7.5					
	Gel 13.2 kWh [kWh]									12	12	12	12	
	Lithium (LiFePO4) 10 kWh [kWh]									9	9	9	9	
	Lithium (LiFePO4) 20 kWh [kWh]									18.5	18.5	18.5	18.5	
12 V services auxiliary battery				•	•	•	•	•	•	•	•	•	•	
battery charge on vehicle (PFC active)	(power supply 230V 16A 50-60Hz)			•	•	•	•	•	•	•	•	•	•	
external quick battery charge (Lithium only)	(power supply 380V 16A 50-60Hz)									Δ	Δ	Δ	Δ	(ext.) +15.0
battery swap system	Lead-Acid 14.4 kWh									•	•	•	•	
	Gel 13.2 kWh									•	•	•	•	
battery top-up	Lead-Acid 10 kWh			Δ	Δ	Δ	Δ	Δ	Δ	Δ	Δ	Δ	Δ	+ 0.0
	Lead-Acid 14.4 kWh			Δ	Δ	Δ	Δ	Δ	Δ	Δ	Δ	Δ	Δ	+ 0.0
CONFIGURATIONS AND CARGO AREA ACCESSORIES														
dropside body with manual tipping (aluminium drop sides H30 cm)	130 x 123 cm			Δ										+ 105.0
	180 x 123 cm				Δ	Δ ⁽¹⁾	Δ ⁽¹⁾	Δ ⁽¹⁾	Δ ⁽¹⁾	Δ ⁽¹⁾	Δ ⁽¹⁾	Δ ⁽¹⁾	Δ ⁽¹⁾	+ 130.0
	200 x 140 cm					Δ ⁽²⁾	Δ ⁽²⁾	Δ ⁽²⁾	Δ ⁽²⁾	Δ ⁽²⁾	Δ ⁽²⁾	Δ ⁽²⁾	Δ ⁽²⁾	+ 160.0
	250 x 140 cm											Δ ⁽³⁾		+ 180.0
pair of side toolboxes												Δ ⁽³⁾		+ 20.0
flatbed for special configurations	130 x 123 cm			Δ										+ 80.0
	180 x 123 cm				Δ	Δ ⁽¹⁾	Δ ⁽¹⁾	Δ ⁽¹⁾	Δ ⁽¹⁾	Δ ⁽¹⁾	Δ ⁽¹⁾	Δ ⁽¹⁾	Δ ⁽¹⁾	+ 90.0
	200 x 140 cm					Δ ⁽²⁾	Δ ⁽²⁾	Δ ⁽²⁾	Δ ⁽²⁾	Δ ⁽²⁾	Δ ⁽²⁾	Δ ⁽²⁾	Δ ⁽²⁾	+ 120.0
mesh sides extension H55 cm with rear drop side with upwards opening	for body 130 x 123 cm			Δ										+ 25.0
	for body 180 x 123 cm				Δ	Δ ⁽¹⁾	Δ ⁽¹⁾	Δ ⁽¹⁾	Δ ⁽¹⁾	Δ ⁽¹⁾	Δ ⁽¹⁾	Δ ⁽¹⁾	Δ ⁽¹⁾	+ 29.0
	for body 200 x 140 cm					Δ ⁽²⁾	Δ ⁽²⁾	Δ ⁽²⁾	Δ ⁽²⁾	Δ ⁽²⁾	Δ ⁽²⁾	Δ ⁽²⁾	Δ ⁽²⁾	+ 30.0
	for body 250 x 140 cm											Δ ⁽³⁾		+ 40.0
COMBI mesh sides extension H55 cm 150 x 123 cm with rear drop side						Δ ⁽²⁾	Δ ⁽²⁾	Δ ⁽²⁾	Δ ⁽²⁾	Δ ⁽²⁾	Δ ⁽²⁾	Δ ⁽²⁾	Δ ⁽²⁾	+ 30.0
electro-hydraulic tipping for dropside body unit	for body 130 x 123 cm			Δ										+ 14.0
	for body 150 x 123 cm					Δ ⁽²⁾	Δ ⁽²⁾	Δ ⁽²⁾	Δ ⁽²⁾	Δ ⁽²⁾	Δ ⁽²⁾	Δ ⁽²⁾	Δ ⁽²⁾	
	for body 180 x 123 cm				Δ	Δ ⁽¹⁾	Δ ⁽¹⁾	Δ ⁽¹⁾	Δ ⁽¹⁾	Δ ⁽¹⁾	Δ ⁽¹⁾	Δ ⁽¹⁾	Δ ⁽¹⁾	+ 15.0
	for body 200 x 140 cm					Δ ⁽²⁾	Δ ⁽²⁾	Δ ⁽²⁾	Δ ⁽²⁾	Δ ⁽²⁾	Δ ⁽²⁾	Δ ⁽²⁾	Δ ⁽²⁾	+ 15.0
	for body 250 x 140 cm											Δ ⁽³⁾		+ 20.0
dropside body 180 x 123 cm with three side hydraulic tipping						Δ ⁽¹⁾	Δ ⁽¹⁾	Δ ⁽¹⁾	Δ ⁽¹⁾	Δ ⁽¹⁾	Δ ⁽¹⁾	Δ ⁽¹⁾	Δ ⁽¹⁾	+ 190.0
tarpaulin body H108 cm openable on three sides for dropside body	for body 130 x 123 cm			Δ										+ 25.0
	for body 180 x 123 cm				Δ	Δ ⁽¹⁾	Δ ⁽¹⁾	Δ ⁽¹⁾	Δ ⁽¹⁾	Δ ⁽¹⁾	Δ ⁽¹⁾	Δ ⁽¹⁾	Δ ⁽¹⁾	+ 30.0
	for body 200 x 140 cm					Δ ⁽²⁾	Δ ⁽²⁾	Δ ⁽²⁾	Δ ⁽²⁾	Δ ⁽²⁾	Δ ⁽²⁾	Δ ⁽²⁾	Δ ⁽²⁾	+ 35.0
	for body 250 x 140 cm											Δ ⁽³⁾		+ 40.0
custom colour for tarpaulin body				Δ	Δ	Δ	Δ	Δ	Δ	Δ	Δ	Δ	Δ	+ 0.0
tarpaulin body H110 cm for COMBI 150 x 123 cm dropside body						Δ ⁽²⁾	Δ ⁽²⁾	Δ ⁽²⁾	Δ ⁽²⁾	Δ ⁽²⁾	Δ ⁽²⁾	Δ ⁽²⁾	Δ ⁽²⁾	35.0
removable rear seats kit with two independent seats, platform and 2-points seat belts					!	!	!	!	!	!	!	!	!	+ 45.0
tarpaulin roof H105 for rear seats kit					Δ	Δ ⁽¹⁾	Δ ⁽¹⁾	Δ ⁽¹⁾	Δ ⁽¹⁾	Δ ⁽¹⁾	Δ ⁽¹⁾	Δ ⁽¹⁾	Δ ⁽¹⁾	+ 30.0
ambulance body equipped with spine board and box/seat for medical staff					!	! ⁽¹⁾	! ⁽¹⁾	! ⁽¹⁾	! ⁽¹⁾	! ⁽¹⁾	! ⁽¹⁾	! ⁽¹⁾	! ⁽¹⁾	+ 75.0
roof for ambulance body					Δ	Δ ⁽¹⁾	Δ ⁽¹⁾	Δ ⁽¹⁾	Δ ⁽¹⁾	Δ ⁽¹⁾	Δ ⁽¹⁾	Δ ⁽¹⁾	Δ ⁽¹⁾	+ 20.0
box van body H122 cm 180 x 125 cm with sliding doors (2 per side)					Δ	Δ ⁽¹⁾	Δ ⁽¹⁾	Δ ⁽¹⁾	Δ ⁽¹⁾	Δ ⁽¹⁾	Δ ⁽¹⁾	Δ ⁽¹⁾	Δ ⁽¹⁾	+ 130.0
box van body H122 cm 200 x 140 cm with sliding doors (2 per side)						Δ ⁽²⁾	Δ ⁽²⁾	Δ ⁽²⁾	Δ ⁽²⁾	Δ ⁽²⁾	Δ ⁽²⁾	Δ ⁽²⁾	Δ ⁽²⁾	+ 170.0
box van body with side roller shutters H132 cm 180 x 125 cm					Δ	Δ ⁽¹⁾	Δ ⁽¹⁾	Δ ⁽¹⁾	Δ ⁽¹⁾	Δ ⁽¹⁾	Δ ⁽¹⁾	Δ ⁽¹⁾	Δ ⁽¹⁾	+ 150.0
box van body with side roller shutters H132 cm 200 x 140 cm						Δ ⁽²⁾	Δ ⁽²⁾	Δ ⁽²⁾	Δ ⁽²⁾	Δ ⁽²⁾	Δ ⁽²⁾	Δ ⁽²⁾	Δ ⁽²⁾	+ 180.0
set 2 shelves for box van body with sliding doors (each shelf covers half of the depth)	180 x 123 cm				Δ	Δ ⁽¹⁾	Δ ⁽¹⁾	Δ ⁽¹⁾	Δ ⁽¹⁾	Δ ⁽¹⁾	Δ ⁽¹⁾	Δ ⁽¹⁾	Δ ⁽¹⁾	+ 8.0
	200 x 140 cm					Δ ⁽²⁾	Δ ⁽²⁾	Δ ⁽²⁾	Δ ⁽²⁾	Δ ⁽²⁾	Δ ⁽²⁾	Δ ⁽²⁾	Δ ⁽²⁾	+ 12.0
dropside body 150 x 123 cm COMBI						Δ ⁽²⁾	Δ ⁽²⁾	Δ ⁽²⁾	Δ ⁽²⁾	Δ ⁽²⁾	Δ ⁽²⁾	Δ ⁽²⁾	Δ ⁽²⁾	
COMBI storage box 45 x 125 cm H110 cm						Δ ⁽²⁾	Δ ⁽²⁾	Δ ⁽²⁾	Δ ⁽²⁾	Δ ⁽²⁾	Δ ⁽²⁾	Δ ⁽²⁾	Δ ⁽²⁾	
watering unit with 600 L tank						Δ	Δ	Δ	Δ	Δ	Δ	Δ	Δ	+ 140.0
COMBI high pressure cleaner with 210 L tank and 20 m hose						Δ	Δ	Δ	Δ	Δ	Δ	Δ	Δ	
high pressure cleaner with 600L tank and 20 m hose						Δ	Δ	Δ	Δ	Δ	Δ	Δ	Δ	+ 150.0
load lashing eyes on loading bed				Δ	Δ	Δ	Δ	Δ	Δ	Δ	Δ	Δ	Δ	
tail lift and dropside body 200 x 140 cm H30 cm with mesh sides extension H55 cm								Δ ⁽²⁾	Δ ⁽²⁾			Δ ⁽²⁾	Δ ⁽²⁾	+ 370.0

• as standard

Δ optional

! compatible but not type-approved for road circulation

⁽¹⁾ vehicle with standard wheelbase

⁽²⁾ long wheelbase for 200 cm or 50+150 cm COMBI.

⁽³⁾ long wheelbase for 250 cm or 50+150 cm COMBI.

	310	320	330				340				weight [kg]
	E	E	E	ED	EH	EDH	E	ED	EH	EDH	
tail lift and box van body 200 x 140 cm					Δ ⁽²⁾	Δ ⁽²⁾			Δ ⁽²⁾	Δ ⁽²⁾	+ 390.0
isothermal body H120 cm		Δ	Δ ⁽¹⁾	Δ ⁽¹⁾	Δ ⁽¹⁾	Δ ⁽¹⁾	Δ ⁽¹⁾	Δ ⁽¹⁾	Δ ⁽¹⁾	Δ ⁽¹⁾	+ 120.0
isothermal body H130 cm			Δ ⁽²⁾	Δ ⁽²⁾	Δ ⁽²⁾	Δ ⁽²⁾	Δ ⁽²⁾	Δ ⁽²⁾	Δ ⁽²⁾	Δ ⁽²⁾	+ 140.0
refrigerated body 0 +4 °C with side and rear door			Δ ⁽¹⁾	Δ ⁽¹⁾	Δ ⁽¹⁾	Δ ⁽¹⁾	Δ ⁽¹⁾	Δ ⁽¹⁾	Δ ⁽¹⁾	Δ ⁽¹⁾	+ 220.0
			Δ ⁽²⁾	Δ ⁽²⁾	Δ ⁽²⁾	Δ ⁽²⁾	Δ ⁽²⁾	Δ ⁽²⁾	Δ ⁽²⁾	Δ ⁽²⁾	+ 250.0
COMBI waste collection body (1.7 m3 version)			Δ ⁽²⁾	Δ ⁽²⁾	Δ ⁽²⁾	Δ ⁽²⁾	Δ ⁽²⁾	Δ ⁽²⁾	Δ ⁽²⁾	Δ ⁽²⁾	
waste collection body 2.2m ³			Δ ⁽¹⁾	Δ ⁽¹⁾	Δ ⁽¹⁾	Δ ⁽¹⁾	Δ ⁽¹⁾	Δ ⁽¹⁾	Δ ⁽¹⁾	Δ ⁽¹⁾	+ 200.0
waste collection body with bin lift system 2.2m ³			Δ ⁽¹⁾	Δ ⁽¹⁾	Δ ⁽¹⁾	Δ ⁽¹⁾	Δ ⁽¹⁾	Δ ⁽¹⁾	Δ ⁽¹⁾	Δ ⁽¹⁾	+ 280.0
waste collection body 2.8m ³			Δ ⁽²⁾	Δ ⁽²⁾	Δ ⁽²⁾	Δ ⁽²⁾	Δ ⁽²⁾	Δ ⁽²⁾	Δ ⁽²⁾	Δ ⁽²⁾	+ 240.0
waste collection body with bin lift system 2.8m ³			Δ ⁽²⁾	Δ ⁽²⁾	Δ ⁽²⁾	Δ ⁽²⁾	Δ ⁽²⁾	Δ ⁽²⁾	Δ ⁽²⁾	Δ ⁽²⁾	+ 320.0
waste collection body 3.5m ³									Δ ⁽³⁾		+ 280.0
waste collection body with bin lift system 3.5m ³									Δ ⁽³⁾		+ 360.0
tarp system for waste collection body			Δ ⁽¹⁾	Δ ⁽¹⁾	Δ ⁽¹⁾	Δ ⁽¹⁾	Δ ⁽¹⁾	Δ ⁽¹⁾	Δ ⁽¹⁾	Δ ⁽¹⁾	+ 15.0
broom and dustpan holder kit			Δ	Δ	Δ	Δ	Δ	Δ	Δ	Δ	+ 8.0
hydraulic crane coupled with 150x124 cm H30 cm dropside body									Δ ⁽²⁾	Δ ⁽²⁾	+ 400.0
semi-trailer coupling system fitting DIN Ø40 drawbar eyes			Δ	Δ	Δ	Δ	Δ	Δ	Δ	Δ	+ 60.0
reverse inching device for easy trailers coupling			Δ	Δ	Δ	Δ	Δ	Δ	Δ	Δ	+ 4.0
semi-trailer coupling system with fifth wheel fitting 2" kingpins			Δ	Δ	Δ	Δ	Δ	Δ	Δ	Δ	+ 100.0
FRONT / REAR ACCESSORIES											
front pin tow hitch	•	•	•	•	•	•	•	•	•	•	
rear ball tow hitch	•	•	•	•	•	•	•	•	•	•	
rear trailer hitch with ball & pin coupling (instead of standard ball hitch)	Δ	Δ	Δ	Δ	Δ	Δ	Δ	Δ	Δ	Δ	+ 3.5
automatic tow hitch fitting DIN Ø40			Δ	Δ	Δ	Δ	Δ	Δ	Δ	Δ	+ 15.0
front protective bumper	•	•	•	•	•	•	•	•	•	•	
rear 13 pin connector	•	•	•	•	•	•	•	•	•	•	
show plough hydraulic kit	Δ	Δ	Δ	Δ	Δ	Δ	Δ	Δ	Δ	Δ	+ 10.0
snow plough	!	!	!	!	!	!	!	!	!	!	+ 82.0
electric salt spreader	Δ	Δ	Δ	Δ	Δ	Δ	Δ	Δ	Δ	Δ	+ 50.0
anti-roll kit									Δ	Δ	+ 5.0
rear hydraulic kit	Δ	Δ	Δ	Δ	Δ	Δ	Δ	Δ	Δ	Δ	+ 4.0
TYRES											
road tyres (front and rear 175/65 R14)	•	•									
road tyres (front and rear 175/70 R14)			•	•			•	•			
road tyres (front and rear 175/75 R14)					•	•			•	•	
low-profile road tyres (front and rear 225/55 R12)			•	•	•	•	•	•	•	•	
turf tyres (front and rear 23x8.50-12 6PR)	!	!									
turf tyres (front 23x8.50-12 6PR, rear 23x10.50-12 8PR)			!	!	!	!	!	!	!	!	
off-road tyres (front and rear 23x8.50-12 6PR)	!	!									
off-Road tyres (front 23x8.50-12 6PR and rear 23x10.50-12 8PR)			!	!	!	!	!	!	!	!	
tyres puncture protection treatment	Δ	Δ	Δ	Δ	Δ	Δ	Δ	Δ	Δ	Δ	
spare wheel (provided separately)	Δ	Δ	Δ	Δ	Δ	Δ	Δ	Δ	Δ	Δ	(ext.) +18.0

note **Top speed:** approximate, obtained on a flat surface in optimum usage conditions and in SPORT mode. **Maximum negotiable slope:** approximate and assessed with vehicle empty in ideal usage conditions on discontinuous ramps. **Maximum autonomy:** the max autonomy value reported is indicative and refers to homologation data collected on WLTP cycle basis (combined circuit) with an configuration Alke' ATX vehicle with basic flatbed configuration. **Estimated battery lifespan:** approximate figure, based on the information in the manufacturer's possession at the time this file was published. **Maximum towing capacity:** calculated in optimum usage conditions, the trailers must have repulsion brakes and comply with the law. Maximum vertical weight on the tow hitch: 120kg. **The technical specifications indicated in this catalogue** (performance, autonomy, dimensions, etc.) depend - or may depend - on temperature, terrain, driving style, accessories, load or use of the vehicle. The data usually refers to use on a flat surface in optimum usage conditions - i.e. a basic vehicle version with no load and with the lightest battery, on an even and paved road surface with an outdoor temperature of 25°C, the battery fully charged, on board electronic devices switched off, and without any other accessory consumption. **The technical specifications,** design and performance levels indicated in this technical data sheet are by way of example only and may be subject to modifications without prior notice.

With more than 25 years of experience and thousands of vehicles on the market, Alkè' is a key player in the electric road and industrial vehicle industry at an international level. Its products are positioned at the high end of the market in

terms of quality and performance and are now sold in more than 40 countries around the world covering all continents. Amongst its customers, Alkè' is proud to be able to include big names in the industry, important organisations and exclusive locations.

25

25 years experience



a key player in the electric vehicle industry



dealers in more than 40 countries



thousands of vehicles sold worldwide



zero emission electric vehicles



quality, innovation and performance



100% made in Italy



Via Cile, 5
35127 Padua | Italy



+39.049.8702400
+39.049.761208



info@alke.com

www

www.alke.com



ISO 9001: 2015 - BN17607/17301
ISO 14001: 2015 - BN17607/17302
ISO 45001: 2018 - BN17607/17303
AEO: IT AEOF 21 1793

The technical specifications, design and performance levels indicated in this technical data sheet are by way of example only and may be subject to modifications without prior notice.

© 2022 Alkè

Rev. 220210